


mod. CAB1400GTN | cod. 06260000

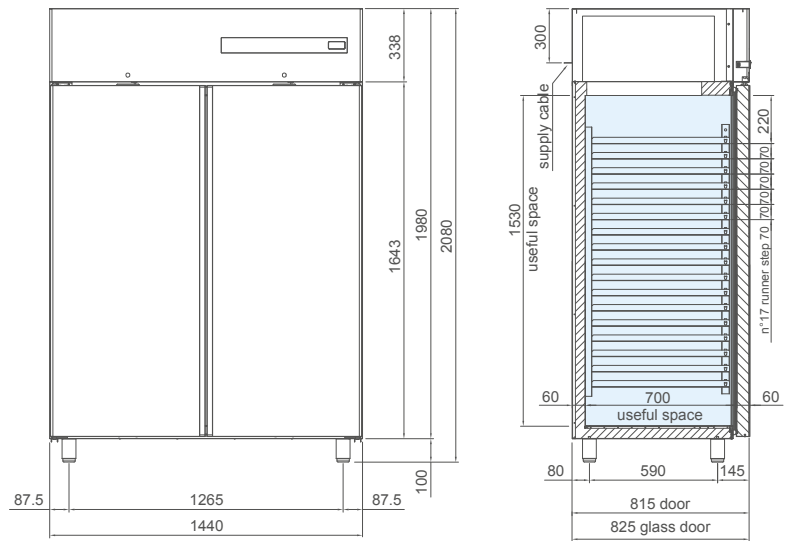

EN TECHNICAL SPECIFICATIONS

Available temperature	Dimensions W x D x H (mm)	Packaging dimensions W x D x H (mm)	Refrigerant gas	Net volum (L)	Climate class	Energy class	Power consumption (W)	Supply voltage	Annual consumption (kWh/year)
0 / +10	1440x815x2080	1460x860x2240	R290	1180	5	D	580	220-240 V 50 Hz	602

EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated cabinet equipped with a monobloc unit that is tropicalized and easily removable from the body, with forced ventilated refrigeration with R290 gas
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to energy class 5
- 60 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m³
- Temperature detection by means of a thermistor sensor (NTC probe)
- Operation control through a digital “touch” panel
- Automatic defrosting with compressor cut off in the 0/+10° C version
- Automatic defrosting with electric resistance in the -2/+10° C version
- Automatic evaporation of condensate water by means of a heat exchanger in AISI 316L stainless steel
- Reversible opening doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable magnetic gaskets
- U-shaped guides and adjustable and extractable racks for grids
- Rounded internal corners for quick and easy cleaning
- Evaporator painted for cataphoresis with high corrosion resistance
- Internal Led lighting as standard
- 6 GN 2/1 polyethylene grids as standard
- Height-adjustable stainless steel feet
- Lock with key

V-2+10CAB - cod. 06290410: -2/+10 °C working temperatur version

OPTIONAL

- Stainless steel couple of “L” and “U” runners
- Stainless steel grid GN 2/1
- Polyethylene tray GN 1/1
- Stainless steel grid 400 x 600 mm
- Couple “L” runners for grid 400 x 600 mm
- Kit with ducting
- Bottle rack
- Upper hook rack for meat
- Set of 4 castors

