

MULTIMAX 6-11

GN 6+1 X 1/1

Combi steamer, electric, left hinged



HIGHLIGHTS

- 5" touch-display (resistiv)
- Language neutral operation
- Push-dial
- Eloma live steam system
- 6 fan speed levels, programmable
- HACCP data logging and display
- Semi-automatic cleaning system (autoclean® optional)
- SPS®: Steam protection system
- Active Temp: automatic preheat / cool down

MULTIMAX 6-11 GN 6+1 X 1/1

DIMENSIONS

Width x depth x height in mm: 925 x 805 x 840
Weight: 115 kg
Weight with packaging: 140 kg
Number levels: 6+1 x GN 1/1
Distance between levels: 67 mm
Cooking chamber volume: 268 l

ELECTRICAL SUPPLY

Voltage: 400V/ 3 N AC [230V /3 AC ^{x1)}
Connection load: 11,00 kW
Rated current: 16,1 Amp
Protection: 3 x 16 Amp
Res. current circuit breaker, frequency converter 1PH: 10Amp
Recommended cross section: 2,5 qmm

Noise emission: < 70 dB (A)

Article number: EL6103002-2A
EL6103009-2A ¹⁾
EL6103005-2A ²⁾
EL6103007-2A ³⁾
EL6103027-2A ^{x1)}

- ¹⁾ - no Autoclean, no Multi Eco system
- ²⁾ - no Multi Eco system
- ³⁾ - no Autoclean
- ^{x1)} - Special voltage

SAFETY CLEARANCE

Rear: min. 50mm
Right: min. 50mm
Left: min. 50mm
Minimum distance to heat sources: min. 50mm

LOADING CAPACITY

GN 1/1: 6+1
EN / BN*: 5
Plates max Ø32 cm: 18
*Serial-hanging racks GN, EN/BN hanging racks available with accessories

WATER CONNECTION

Water supply/dim: 2 x G 3/4" A
Flow pressure: 2 - 6 bar (200 - 600 kPa)

DRAIN SYSTEM

Version: permanent connection (rec.) or funnel waste trap
Type: DN50 (min. Ø internal: 46mm)
Slope for waste water pipe: min. 3%

WATER QUALITY

General requirement: drinking water
Total hardness: ≤ 3°dh / 70 - 125 ppm / 7-13° TH / 5-9 °e
pH-value: 7,0 - 8,5
Cl (chloride): max. 60 mg/l
Cl₂ (free chlorine): max. 0.2 mg/l
SO₄²⁻ (sulphate): max. 150 mg/l
Fe (iron): max 0.1 mg/l
Temperature: max. 40°C
Electrical conductivity: min. 20 µ S/cm
Water pressure: 4 bar (2 - 6 bar)

WATER CONSUMPTION

Soft water: 16 l/h (at 4 bar)
Hard water: 55 l/h (at 4 bar)

HEAT EMISSION

latent: 3,96 MJ/h, sensitive: 2,772 MJ/h

STANDARDS

Safety: VDE - UL-CSA, SVGW, WRAS
Protection: IPX 5
Built according to: DIN 18866-2



MULTIMAX 6-11 GN 6+1 X 1/1

STANDARD FEATURES

8 operating modes from 30°C to 300°C	Semi-automatic cleaning system
5" touch-display (resistiv)	Multi-point-core-temperature sensor
Language neutral operation	Active Temp
Push-dial	Safety door lock
Eloma live steam system	Integrated spray hose
Steptronic®	Steam discharge
Clima-active: active dehumidification and air inlet	SPS®: Steam protection system
Fan speed in 5 levels and pulsed	Manual steaming
Autoreverse fan wheel for even results	Regeneration mode
HACCP data logging and display	Delta-T cooking
e/2 – energy savind mode	LT-cooking
Time setting from 1 min to 24 h and continues operation	Programlist for up to 99 programs, with each 9 steps
Start time setting up to 24h	


OPTIONS

Right hinged	Ocean version
Multi-eco-system – heat reclamation	External core temperature probe
autoclean®	Connection energy optimisation
Special voltages	LAN-connection

ACCESSORIES (EXTRACT)

Multi-eco condensationhood	Mobile plate rack
Combimix-Kits, support stands and condensation hoods for mix-stations	SmokeFit smoking device
Vario-hanging racks for GN 1/1 and BN 46	Trays, grids and pans
Mobile tray rack, push-in-frame	ProConnect data management software



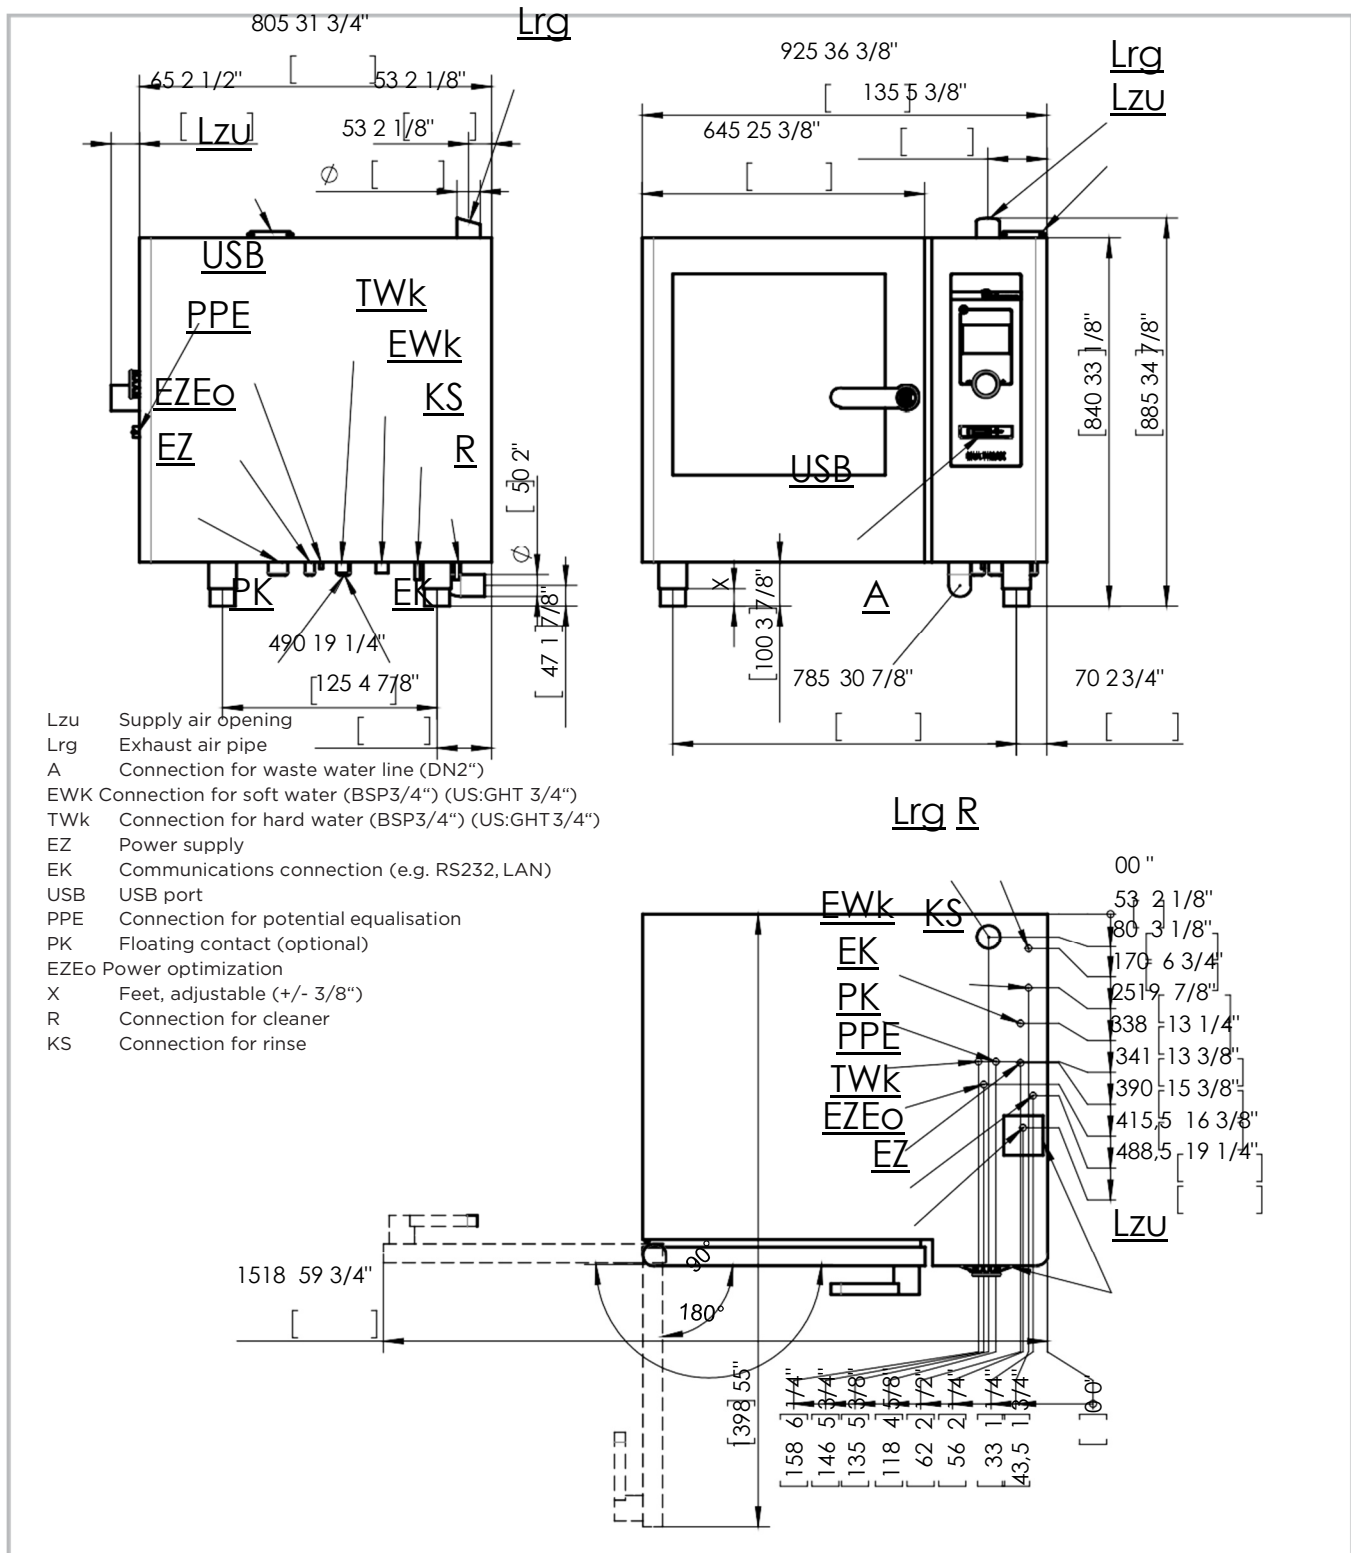

an Ali Group Compar



The Spirit of Excellence